URL: Passing variables

Add the path

```
@page "/reader/{Id:int}"
```

Bind the parameter

```
[Parameter]
public string Id { get; set; }
```

It should be said that via the easy mix of code between the server and the GUI - this approach to pass variables might not the best way.
But it could be used to implement an external facing URL, for example.

You'd then assign a variable with the **@onclick** - where the @-sign denotes it will be run on the server.

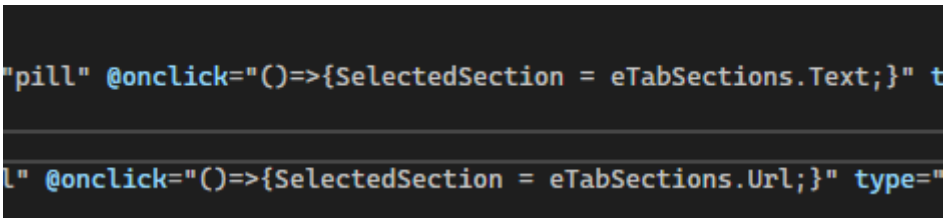

It then allows you to write code that renders different HTML.

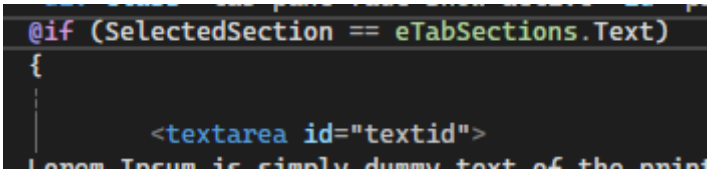

Revision #3
Created 11 October 2024 10:50:51 by Tim
Updated 11 October 2024 12:05:40 by Tim